


G-BH7






Performance curve for Vacuum pump

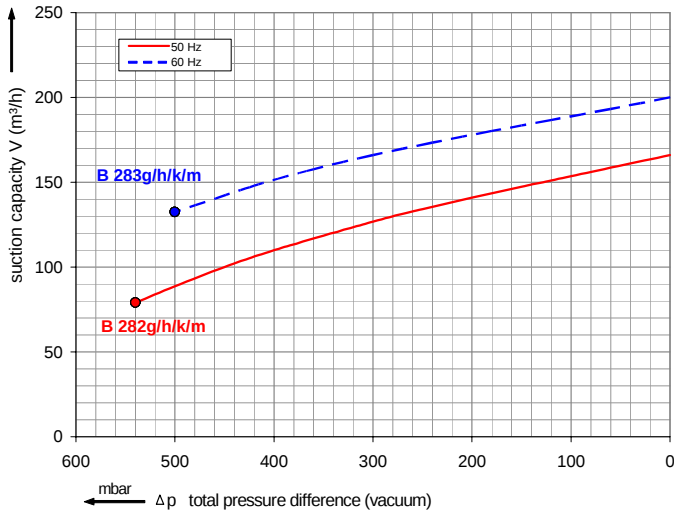

2BH7 630

ATEX - Version

Performance curve for Compressor

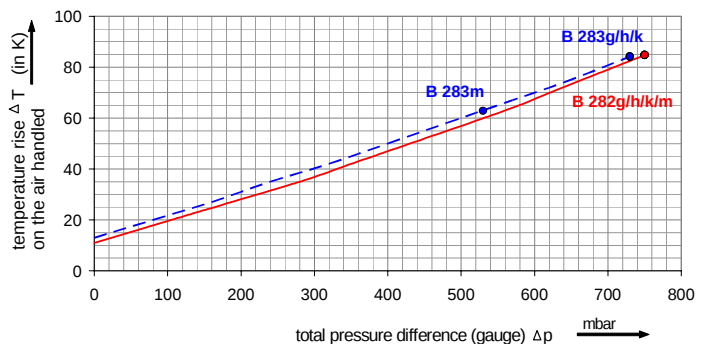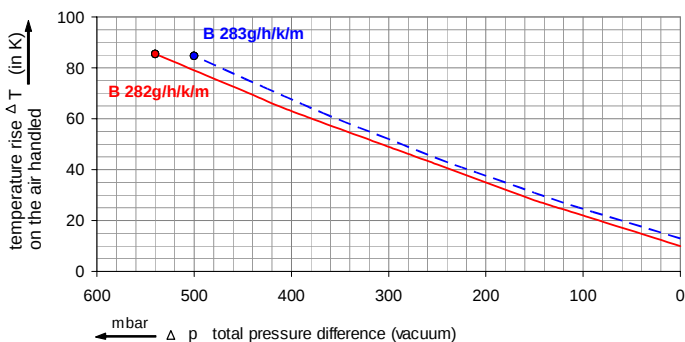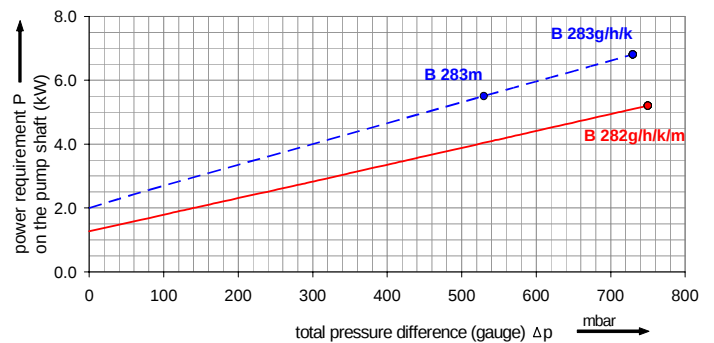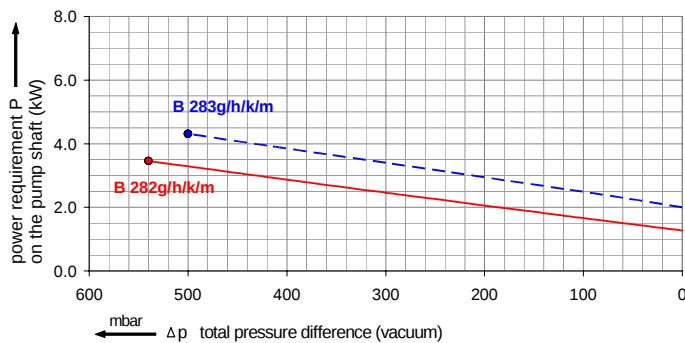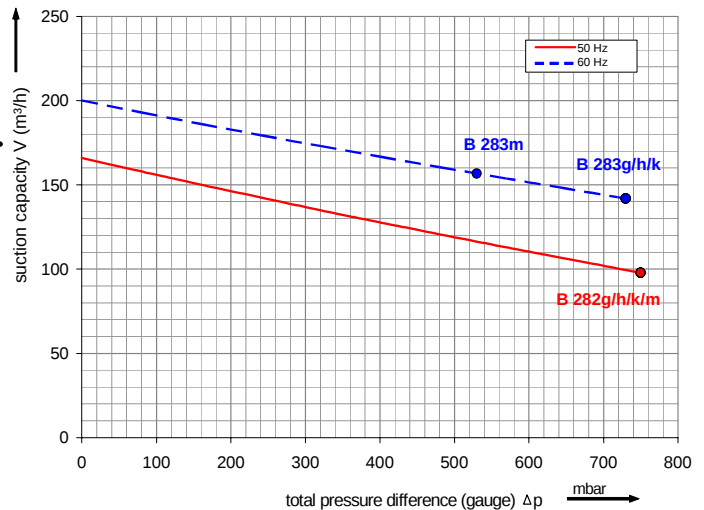

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C.

For other conditions please confer with us.

Each G-BH7 type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. Blowers with ATEX 94/9 EG are available for the category 3D, 3G, 3/2D as well as 3/2G. The motors are available as standard for the input voltage of 50 and 60 Hz and for protection category IP 55 (IP 65 for category 3/2D). For the category 3/2G are only available blowers with the input voltage 50 and 60 Hz, respectively.

Selection and ordering data

Type 2BH7 630

Curve No.	Order No.	Fre- quency	Rated power	Input voltage		Input current		Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	kW	V		A		Vacuum mbar	Compressor mbar	dB(A)	kg

ATEX-Category: 3D (Order-Option M35)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 282g	2BH7630-0AD66-8-Z	50	7.5	400D	690Y	13.8D	8.0Y	-540	750	72	86
B 283g	2BH7630-0AD66-8-Z	60	8.6	460D		13.5D		-500	730	76	86

ATEX-Category: 3G (Order-Option: M72)

3~ 50/60 Hz, IP55, insulation material class F, temperature class T3

B 282h	2BH7630-0AD66-8-Z	50	7.5	400D	690Y	13.8D	8.0Y	-540	750	72	86
B 283h	2BH7630-0AD66-8-Z	60	8.6	460D		13.5D		-500	730	76	86

ATEX-Category: 3/2D (Order-Option: M34)

3~ 50/60 Hz, IP65, insulation material class F, temperature class T3

B 282k	2BH7630-0AD66-8-Z	50	7.5	400D	690Y	13.8D	8.0Y	-540	750	72	86
B 283k	2BH7630-0AD66-8-Z	60	8.6	460D		13.5D		-500	730	76	86

ATEX-Category: 3/2G (Order-Option: M71)

3~ 50 Hz, IP55, insulation material class F, temperature class T3

B 282m	2BH7630-0AD66-8-Z	50	5.5	400D	690Y	10.4D	6.0Y	-540	750	72	82
--------	-------------------	----	-----	------	------	-------	------	------	-----	----	----

3~ 60 Hz, IP55, insulation material class F, temperature class T3

B 283m	2BH7630-0AG66-8-Z	60	5.5	460D		9.6D		-500	530	76	82
--------	-------------------	----	-----	------	--	------	--	------	-----	----	----



Other voltage ranges

2BH7630-0A □ . □ -Z

50Hz 60Hz



3~ ATEX

Category 3D, 3G and 3/2D

230 V D / 400 V Y	460 V Y	D 1
500 V D	575 V D	D 5
400 V D / 690 V Y	460 V D	D 6

Category 3/2G

230 V D / 400 V Y	---	D 1
500 V D	---	D 5
400 V D / 690 V Y	---	D 6
---	460 V Y	G 1
---	575 V D	G 5
---	460 V D	G 6

Further voltage range on request; please quote in plain text.

All G-BH7 achieve the standards and norms of the low voltage directive 72/23/EWG, rotating electrotechnical motor EN 60034-1-34, electromagnetic compatibility (EMC) DIN EN 61000-3/-6/-4.

²⁾ Relief-valve are available for limiting differential pressure.

³⁾ Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (vacuum pump) / suction side (compressor), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage. The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

**Gardner
Denver**

Elmo Rietschle is a brand of the
Gardner Denver Blower Division

info@de.gardnerdenver.com
www.gd-elmoietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstr. 58
79650 Schopfheim · Germany

Tel. +49 7622 392-0
Fax +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestr. 26
97616 Bad Neustadt · Germany

Tel. +49 9771 6888-0
Fax +49 9771 6888-4000